

## AD402 Series Auto Drain



This product often applies to automatically remove the seeper at the lower places of piping, refrigerated air dryer, oil water separator, gasometer and the bottom of various air filters. It can be installed in the places inconvenient for manual discharge of sewage, such high, low and narrow places, especially there is large consumption of air or frequent water drains. It can prevent the compressed air being re-polluted by condensing to water resulting from neglect of manual drain.

### Specifications

### Symbol




Model	AD402-02	AD402-03	AD402-04
Proof pressure	1.5MPa		
Operating pressure	0.15MPa ~ 1.00MPa		
Ambient and fluid temperature	5 ~ 60℃		
Port size	G1/4"	G3/8"	G1/2"
Drain port size	G1/8"		
Drain status	Normal open type		
Fluid	Compressed air		

### Features

- Auto drain
- Air shutoff drain
- Manual drain
- The bowl is provided with metal bowl guard

### Dimensions

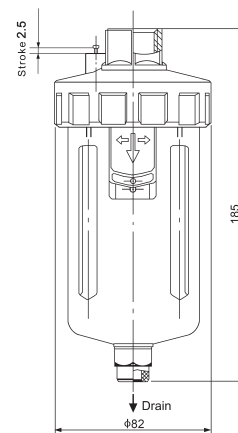

### Attention

When using, the drainer should be installed vertically and the drain port should face down.